

## ELECTRICAL STEAM BOILER

### Pressure Vessel

Boiler quality steel construction. S.S. Heavy duty electric heaters, imported water level regulator, electric solenoid stem release safety valve.

### Water Feed Pump

High pressure imported peripheral pump automatically inject water into the pressure vessel.

### Fully Automatic

Fully Automatic Pressure control, temperature control, water injection. Dry cutoff device, excessive steam pressure release.

MODEL	RATING	STEAM OUTPUT	STEAM CONNECTION	SATIABLE FOR NO OF IRONS	OVERALL DIMENSION (WxDxH)	DRY WEIGHT (APPX).
SFEQ-18	18KW	18kg	1"	6	360X640X775	36kg



## FLATWORK IRONER



### SALIENT FEATURES

1. VFD FOR VARIABLE ROLLS SPEED
2. LESS ENERGY CONSUMPTION.
3. HIGHER OUT PUT.
4. LIMITED SPACE REQUIREMENTS.
5. ALL SIZE 304(12,457(18),610(24),762(30),812(32") ROLL DIAMETER  
WORKING WIDTH FROM 2 MTR. TO 4.1 MTR., SINGLE ROLL VERSION. 6. STEAM, ELECTRIC HEATING OR THERMAL FLUID HEATED MODELS AVAILABLE
7. TEMPERATURE ADJUSTABLE TO 17C

MODELS	ROLLER DIMENSIONS (WITHOUT PADDING)	NORMAL ROLLER SPEED AT 50 Hz	AC INVERTER (VFD) VARIABLE SPEED	CONNECTION		HEATING THERM. CONTROLLED		OVER ALL DIMENSION ( WxDxH) IN MM
				DRIVE MOTOR	SUCTION MOTOR	ELECTRIC	STEAM	
SFFW-30	3000x800	4.66 RPM	2-12RPM	1HP	NA	36KW	NA	3200x1350 x1350

Note: Specifications are subject to change.

## FLAT BED PRESS

### Flat Bed Press

Flat Bed Press suitable for Table Covers, Pillow Covers, Napkins, Kitchen linen, staff uniform of Hotels & Hospitals, This May press textile articles. The suction Feature, Quality Padding and Teflon lining on Hot Head Guarantee fine finishing/pressing. Automatic .Auto programmable with Reset feature. Auto temperature Control, Pneumatically operated. Available in 30"X60" size (750X1500) sizes of Head/Bed. Also available as per customer requirement .Heating System available steam , Electric (9KW dry heating) and thermic Hat transfer Fluids.



MODELS	HEAD& BED SIZE	SUCTION BLOWER	BLOWER CAPACITY	HEATING		AIR CONNECTION	AIR CONSUMPTION	DIMENSIONS OPENHEAD
				STEAM CONNECTION CONSUMPTION	ELECTRIC			
SFFBP	1500X750	0.37KW	285 lt./sec	15 (0.5"BSP) 40kg./Hr.Appx.	9KW	15 (0.5"BSP)	100lt.Appx	1600X1580 X1900

## GARMENT PACKING



Seals the garment in polyester bag. Automatic timer for heat seal. Upper blade for cross cut & lower one for chamfer cut. Easy to pull down the poly bag.

Note: Specifications are subject to change.

**MOBILE TROLLEY****Specifications**

- For transporting clean linen from Laundry to destination.
- stainless steel construction
- Strengthened with U profile every 30 – 40cm approx. • Front and sides strengthened with stainless steel band
- Legs 40 x 40mm x 3mm thick mild steel (Chrome coated) box profile
- Cross rails 40 x 40mm x 3mm thick mild steel (Chrome coated) box profile
- 150mm rubber castors • Approx. dimension 1900 x 700 x 850mm

Note: Specifications are subject to change.

## DRYING TUMBLER

Front loading, Stainless steel inner basket, high suction centrifugal powerful blower, Large Dia die pressed door double glasswool insulated outer body Auto Timed, Auto reverse, Auto digital temperature control.

Heating: Electric/Thermic fluids/indirect Oil/Gas firing.

Specially designed for Garment Export Industry, Denim Processing units, Home Furnishing, Hosiery Dyeing Industry, Terry Towel Plants. All Types of laundry works for Hotels/Hospitals to get uniform drying, rapidity softness & shrinkage control.

**Dryers are also available in all S.S. Construction**  
**Cool down feature, PLC operated and AC drive operated (Optional)**



### Indirect Oil/Gas Fired heating system

specially designed Heat exchanger with Automatic imported Impored diesel/Gas burners, High efficiency, Low cost & easy to install. Every equipment is an independent unit (Optional Features)

**No Need to install Boiler**


MODEL	CAPACITY	BASKET SIZE dia X depth VOLUME	DRIVE MOTOR BLOWER MOTOR	HEATING OPTIONS				AIR DELIVERY AIR OUTLET	LOADING DOOR OPENING	OVER ALL DIMENSIONS (WxDxH)
				ELECTRIC	STEAM	INDIRECT DIESEL FIRED CONSUMPTION	THERMIC FLUID CONNECTION CONSUMPTION			
					CONNECTION CONSUMPTION					
SFDT-7	7kg	800eX400	0.37 HP	6KW	NA	NA	NA	600F <sup>2</sup> /Hr	365	700x990 x1530
		110litrs.	0.37					150		
SFDT-20	20kg	800eX600	0.75	9KW	15 (0.5"BSP)	NA	0.5"x0.5"BSP 1000 K.Cal/Hr.	1500F <sup>2</sup> /Hr	550	1000x1540 x1920
		380litrs.	0.75		20kg/Hr.			225		
SFDT-30	30kg	950eX950	0.75	18KW	15 (0.5"BSP)	1.5-2Ltrs/Hr	0.5"x0.5"BSP 15000 K.Cal/Hr.	1500F <sup>2</sup> /Hr	640	1050x1540 1920
		670litrs.	0.75		40kg/Hr.			225		
SFDT-60	60kg	1250eX990	3HP	38KW	20 (0.75"BSP)	2.5-3.5Ltrs/Hr	1"x1"BSP 40000 K.Cal/Hr.	3000F <sup>2</sup> /Hr	750	1350x1990 X2300
		1241litrs.	2.2HP		60-80kg/Hr.			300		
SFDT-100	100kg	16000eX11200	3 HP	42KW	20 X2Nos (2 X 1NosBSP)	5.5-6.5Ltrs/Hr	1.5"x1.5"BSP 80000 K.Cal/Hr.	6000F <sup>2</sup> /Hr	825	1655X1170 X2650
		1500 litrs.	2.2 HP X2Nos		100-150kg/Hr.			300x2		
SFDT-240	240kg	1660eX2440	5.5 HP	48KW	20 X2Nos (25 X1NosBSP)	11-16Ltrs/Hr	2"x2"BSP 160000 K.Cal/Hr.	12000F <sup>2</sup> /Hr	1250	2180x2750 x3250
		4553litrs.	1.9KW X4Nos		200-250kg/Hr.			370x2		

Note: Specifications are subject to change.

## SPOTTING MACHINES

### Spotting Machines

1. With or without air compressor
2. Three cold spotting guns.
3. One air/steam heat proof gun.
4. Fully S.S.
5. Movable side arms for small suction.
6. 3 Phase motor & high suction.
7. Easy to operate & repair.

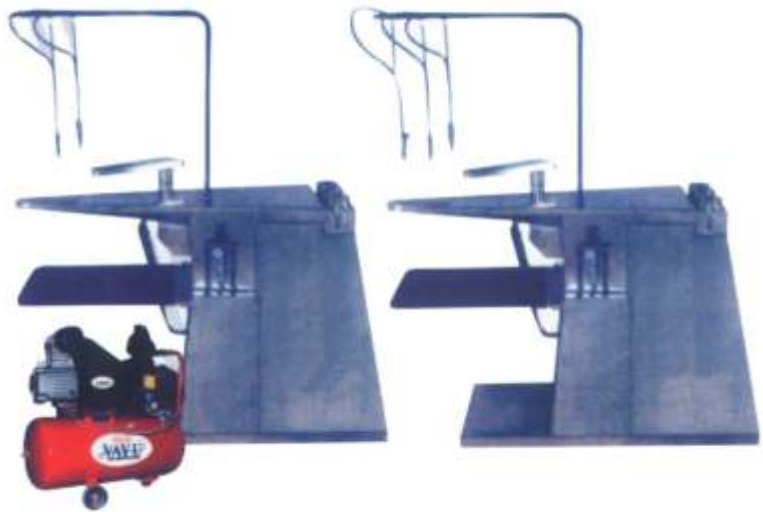

MODEL	SUCTION ARM SIZE(LxWxH) MM	NO. OF CHEMICAL GUNS	SUCTION MOTOR HP	OVERALL DIMENSION (LxWxH) MM	working table size MM
SFSM	400x110	2+1	0.75	690x410x1130	910x255

Note: Specifications are subject to change.

**WASHER EXTRACTOR**



- 1. High Spin
- 2. Fully stainless steel
- 3. Computer controlled
- 4. Variable speed for Washing/Extraction

**Microprocessor control**

Microprocessor come with a touch screen panel. Designed for general use by non Laundry people. Preset programs give the flexibility for today and tomorrow and can be easily modified according to requirements

**Variable Frequency Drive**

V.F.D. Reduces peak energy demands and save energy. Provides separate extraction speeds for various Lines is like having a custom designed machine for each linen.

**Heavy duty bearing housing**

Large close grained cast iron bearing housing with two extra wide roller bearings that are permanently lubricated for trouble free operation. In addition, two high quality seals provide four times the sealing power to isolate the bearings from water and chemical.

**Turned Suspension**

Heavy duty coil spring and matched shock observer result in tuned suspension system that absorbs out of balance load vibration. Strategically placed center of gravity and mass weight placement aid in controlling movements and results in a 90% reduction of force transferred to floor. Optional Air cushion suspension.

**Auto Chemical Dispenser**

Standard Five Compartments dispenser Mounted at the side of the machine at a convenient height and flushes automatically through powerful jets as and when supply signaled by the computer

MODEL	CAPACITY PER CHARGE	BASKET SIZE VOLUME	DRIVE MOTOR	HEATING		WATER CONNECTION	DRAIN	DOOR OPENNING	DIMENSION (WxDxH)
				ELECTRIC	STEAM CONNECTION CONSUMPTION				
SFWX- 20	20kg	ø850X375	3.75KW	12KW	ø15/(0.5"BSP)	2"x1"	3"	ø375	1320X1150X1650
		212Lts.			15kg				
SFWX- 30	30kg	ø900X500	5KW	18KW	ø15/(0.5"BSP)	2"x1"	3"	ø450	1370X1450X1725
		318Lts.			25kg				
SFWX- 50	50kg	ø915X760	5KW	36KW	ø20/(0.75"BSP)	2"x1"	3"	ø475	1510x1450x1860
		500Lts.			50kg				
SFWX- 80	80kg	ø1320X590	11KW	39KW	ø25/(0.1"BSP)	2"x1 1/2"	4"	ø700	1830x1450x2160
		800Lts.			100kg				

Note: Specifications are subject to change.

**SOLID SHELF****Solid Shelf Stainless Steel**

4 tier shelf for linen storage.

Material: stainless steel 50x50x3mm .

Description Dimensions: (W X D X H) SS 4 Tier rack (SOLID) 2000 x 600 x 1500mm.

Clearance from ground is 30mm shelf height – at least 300mm

Note: Specifications are subject to change.

**LAUNDRY TABLE**

This table should offer sufficient space to sort, fold, and organize laundry. This item should be built with industry-strength features including a 0.75-inch high-density particle board, a solid core top, a 0.03-inch thick laminated surface, vinyl bullnose edges, and 16-gauge steel table aprons. Plus, it should be designed with foldable safety-lock legs and non-marking linear polyethylene feet for added protection. Its legs have a baked-enamel finish, but the tabletop surface, edges, and frame are all customizable. Robust metallic stands

Dimensions: 1050 x 1000 x 2000mm


Note: Specifications are subject to change.



**MOBILE GARMENT RAILS**

Mobile Garments Rails  
stainless steel mobile garment rails.  
Approx. dimensions 1360 x 650 x 1710mm 4  
lockable rubberized castors of 100mm dia

Note: Specifications are subject to change.

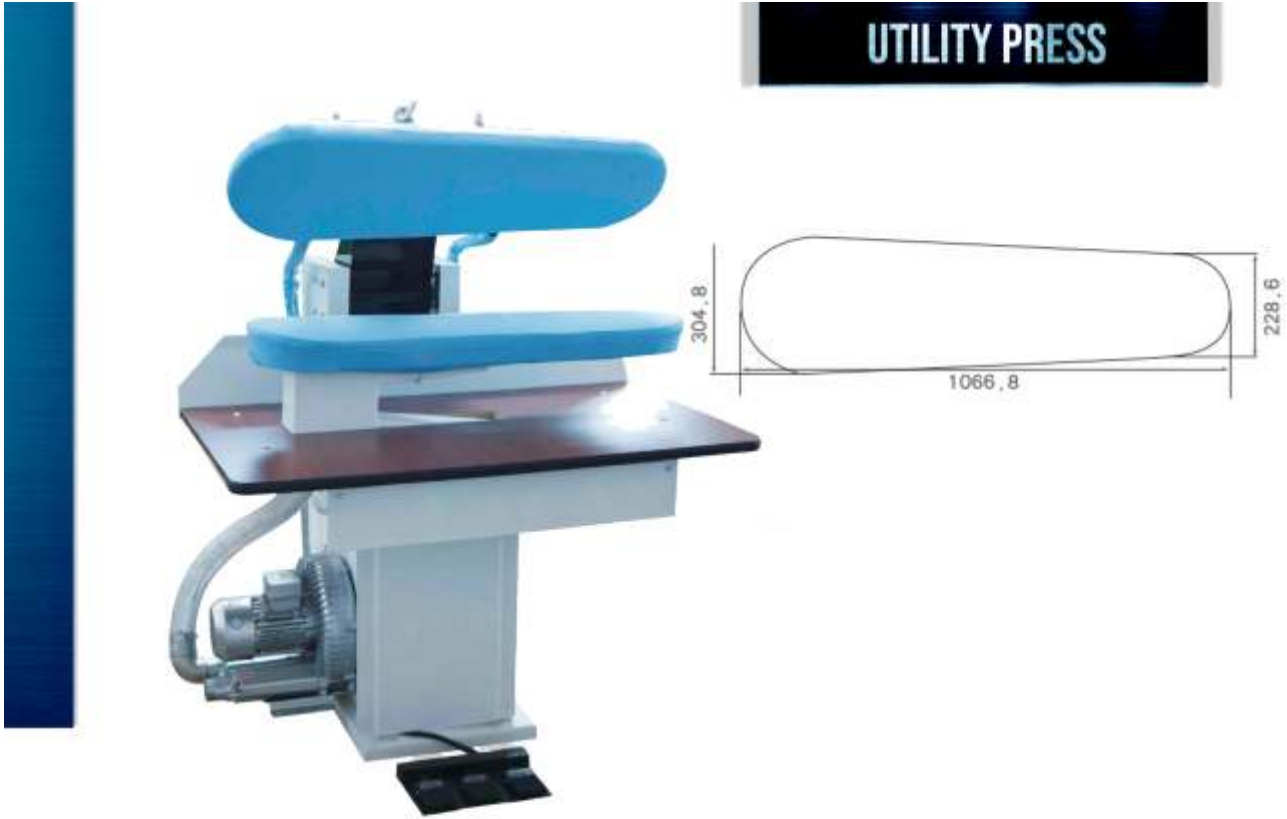

- With the special design of air passage, the upper deck can stop at the desired position arbitrarily. It achieves the same effect as the manual utility press, but greatly saves labor intensity, improve work efficiency and reduce procurement costs.

Part of Pressing	Steam pressure	Steam Consumption	Compressed air pressure	Size	Weight	Fitting	Power
Utility Manual	0.4~0.5Mpa	20kg/h	0.4~0.5Mpa	1200*1400*1400	320kg	Steam boiler	380V 50Hz

Note: Specifications are subject to change.

VACCUM IRONING TABLE



**Vacuum Finishing Tables**

Table TOP padded with imported Silicon padding.  
 Strong welded construction, Thermostatically controlled stainless steel table heater. Extended exhaust duct with lighting device. POWERFUL SUCTION through centrifugal blower activated by spring loaded full length foot pedal working in conjunction with sturdy micro switch.  
 Silicon iron stand protects ironing and Teflon soles with stand up to 1500C of temperature.

1. Covered with Silicon Foam with Heat Proof Cloth
2. Low maintenance.
3. Tables exact moisture and heat instantly ensuring crease free and dry garments.
4. Available economical spares and services.

MODEL	TABLE TOP SIZE	SUCTION MOTOR	NET WT.	OVERALL DIMENSION (WxDxH)
SFVT-42	30X48 <sup>0</sup>	.37KW	90kg	760x1220 x840

Note: Specifications are subject to change.



**LAUNDRY TROLLEY**

Laundry Trolleys, 500 Lts

Universal **stainless steel** laundry trolley with rubber castors (Approx. dia 150mm lockable)

Approx. dimension 700(H) X 700(W) X 1300(L) mm

Provided with drain valve

Note: Specifications are subject to change.

**LAUNDRY CANVAS BAG**

Heavy-Duty Laundry Basket Cart Trolley The cart work as a hamper and laundry basket: it holds clothing like a hamper and moves them like a basket. With a removable canvas bag and rolling, multi-directional castors. Product details

- Product name: Linen cart - Material: Canvas + stainless steel
- Product Features - Easy & Quick Assembly - Smooth surface, easy to clean - Strong stability and durability, ensuring its long-term daily use - Castor Size 150mm dia. rubberized.
- Size – 900 x 650 x 800 mm

Note: Specifications are subject to change.

## UTILITY IRON



- Be able to absorb and blow wind.
- Be able to light, iron and heat the table.
- The controlling system is very practical and simple.
- The iron, spray gun, electromagnetic valve and temperature controller are all imported.
- Two working site, and you can iron the garment with both hands. The working table can be customized.

MODEL	TABLE TOP SIZE	SUCTION MOTOR	NET WT.	OVERALL DIMENSION (WxDxH)
Sfut-42	56X16	.37KW	90kg	760x1220 x840

Note: Specifications are subject to change.