

Features:

- Rugged Shielded case
- Other standard and custom HPF models
- Wide selection of cutoff frequency
- Small & Rigid design
- Economical

Description:

The TFH1806-3166SLC is a High pass filter in a shielded package fabricated using SMD LC technology. Covering 180-1500 MHz bandwidth, these units offer decent matching within the passband and high rejection in stopband.

Applications:



- Amateur Radio Equipment's
- Test and measurement equipment
- Secure communications
- Wearables
- Security systems
- Broadcasting
- Radio Communications
- Navigations

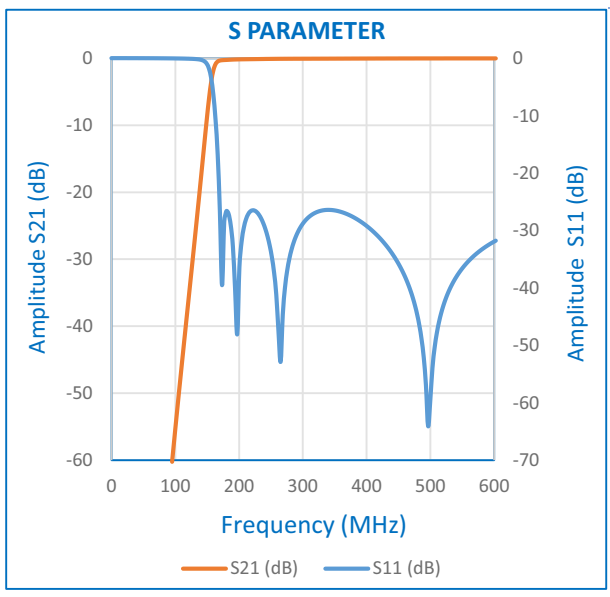


Electrical Specifications:

Frequency Range	180 - 1500 MHz
Power Capacity	0.5 W
Insertion Loss	- 3 dB Max
Return Loss	-15 dB Min
VSWR	1.5:1
Input Connector	SMA (M)/ SMA (F)
Output Connector	SMA (F)
Operating Temperature	0°C - 50°C

Mechanical Specifications:

Dimensions (mm) :	 (L) = 56 (B) = 28.7 (H) = 17.4 (A) = 49 (∅) = 19	 ∅ = 19 A
Shape:	Cuboidal/ Cylindrical shape	
Weight :	Cuboidal :71 gm / Cylindrical :25 gm	



Filter Kits Available:

- LPF (11 TYPES)
- HPF (9 TYPES)
- BPF (5 TYPES)



Note: Specifications are subject to change.